



CAST STEEL GLOBE VALVES

Premium technical presentation for industrial valve supply, procurement and project coordination across Latin American energy markets.

BS 1873 / ASME B16.34

CL150 - CL2500

RF / RTJ / BW ENDS

PRIMARY APPLICATIONS	Oil & gas pipelines petrochemical mining chemical process
PRODUCT SCOPE	Cast steel globe valves with bolted bonnet and pressure seal options
CONTACT	www.petrogasperu.com mail@petrogasperu.com

ENGINEERED SOLUTIONS. DELIVERED FAST.

High-performance industrial products for critical operations in **Oil & Gas**, **Chemical**, **Mining**, and **Water Treatment** across Latin America.



FAST-TRACK
DELIVERIES



INDUSTRIAL
GRADE QUALITY




RELIABLE
PARTNER



RESPONSIVE
SERVICE

OUR PRODUCTS

-  FORGINGS & CASTINGS
-  SAFETY VALVES
-  BREATHER VALVES
-  FLAME ARRESTORS

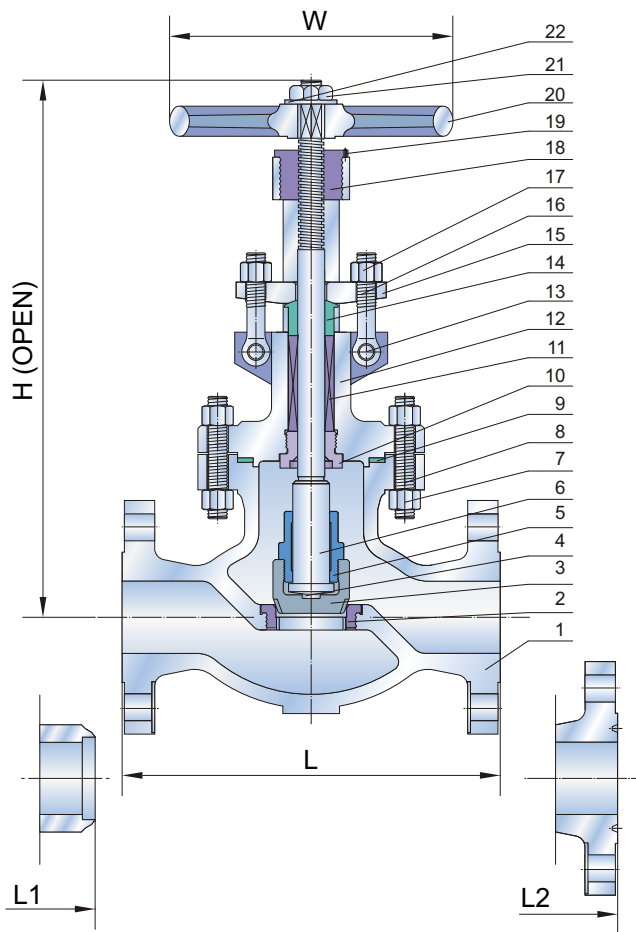

FEATURES

OS & Y, Rising Stem
Bolted Bonnet
Conic Disc
Extended Bonnet for Cryogenic Services
Impact Handwheel Optional
Gear Optional


SPECIFICATIONS

Design	ASME B16.34/BS 1873
Face to Face	ASME B16.10
End to End	ASME B16.10
End Flange	ASME B16.5
BW End	ASME B16.25
Test	API 598
Special	NACE MR-01-75


STANDARD MATERIALS OF PARTS

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105 + Stellite Faced
3	Disc	ASTM A105 + 13Cr Faced
4	Disc Thrust Plate	ASTM A276 Type 420
5	Disc Nut	ASTM A276 Type 410
6	Stem	ASTM A182 GR.F6a
7	Bonnet Bolt Nuts	ASTM A194 GR.2H
8	Bonnet Bolts	ASTM A193 GR.B7
9	Gasket	Soft Iron+Graphite
10	Backseat Bushing	ASTM A276 Type 410
11	Stem Packing	Braided Graphite & Die formed Graphite Ring
12	Bonnet	ASTM A216 GR.WCB
13	Eye Bolt Pins	Carbon Steel
14	Gland	ASTM A276 Type 410
15	Gland Flange	ASTM A216 GR.WCB
16	Gland Eye Bolts	ASTM A307 GR.B
17	Eye Bolt Nuts	ASTM A194 GR.2H
18	Yoke Bush	ASTM A439 GR.D-2
19	Screw	Carbon Steel
20	Handwheel	Ductile Iron
21	Handwheel Nut	ASTM A194 GR.2H
22	Washer	Carbon Steel

Gear Standard
for 16" & Larger



Dimensions and Weights												CLASS150
SIZE	in mm	2" 50	2.5" 65	3" 80	4" 100	6" 150	8" 200	10" 250	12" 300	14" 350	16" 400	18" 450
L/L1	in	8.00	8.50	9.50	11.50	16.00	19.50	24.50	27.50	31.00	36.00	38.50
	mm	203	216	241	292	406	495	622	698	787	914	978
L2	in	8.50	9.00	10.00	12.00	16.50	20.00	25.00	28.00	31.50	36.50	39.00
	mm	216	229	254	305	419	508	635	711	800	927	991
H	in	13.58	16.34	15.94	19.09	20.47	23.62	30.00	33.94	38.58	47.05	51.18
	mm	345	415	405	485	520	600	762	862	980	1195	1300
W	in	8	8	10	12	14	18	20	25	25	24	24
	mm	200	200	250	300	350	450	500	640	640	610	610
Weight RF	kg	22	32	38	62	104	159	308	539	610	880	1150

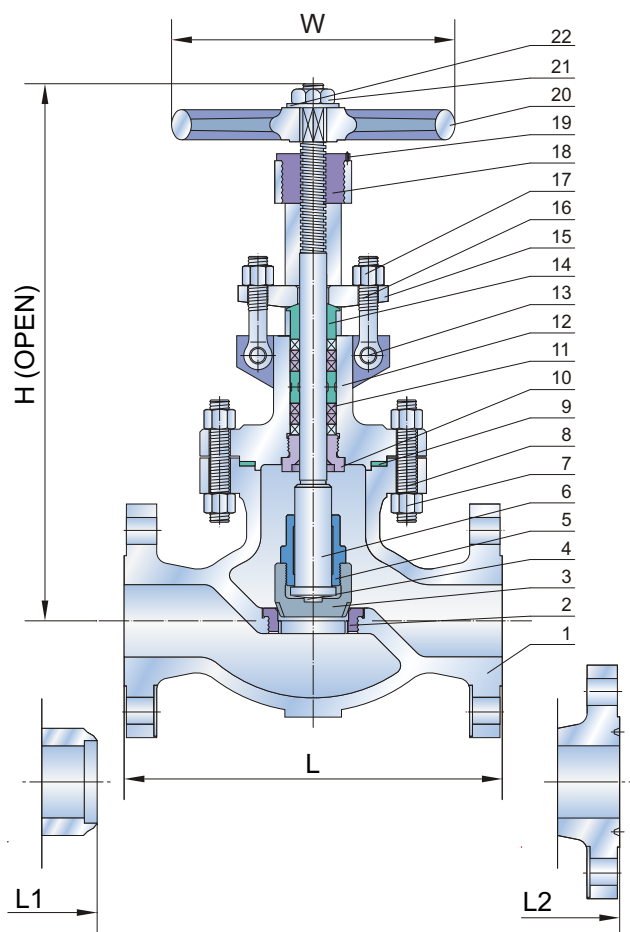

FEATURES

OS & Y, Rising Stem
Bolted Bonnet
Conic Disc
Extended Bonnet for Cryogenic Services
Impact Handwheel Optional
Gear Optional


SPECIFICATIONS

Design	ASME B16.34/BS 1873
Face to Face	ASME B16.10
End to End	ASME B16.10
End Flange	ASME B16.5
BW End	ASME B16.25
Test	API 598
Special	NACE MR-01-75


STANDARD MATERIALS OF PARTS

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105 + Stellite Faced
3	Disc	ASTM A105 + 13Cr Faced
4	Disc Thrust Plate	ASTM A276 Type 420
5	Disc Nut	ASTM A276 Type 410
6	Stem	ASTM A182 GR.F6a
7	Bonnet Bolt Nuts	ASTM A194 GR.2H
8	Bonnet Bolts	ASTM A193 GR.B7
9	Gasket	Soft Iron+Graphite
10	Backseat Bushing	ASTM A276 Type 410
11	Stem Packing	Braided Graphite & Die formed Graphite Ring
12	Bonnet	ASTM A216 GR.WCB
13	Eye Bolt Pins	Carbon Steel
14	Gland	ASTM A276 Type 410
15	Gland Flange	ASTM A216 GR.WCB
16	Gland Eye Bolts	ASTM A307 GR.B
17	Eye Bolt Nuts	ASTM A194 GR.2H
18	Yoke Bush	ASTM A439 GR.D-2
19	Screw	Carbon Steel
20	Handwheel	Ductile Iron
21	Handwheel Nut	ASTM A194 GR.2H
22	Washer	Carbon Steel
23	Lantern Ring On Request	ASTM A276 Type 410


Lantern Ring On Request



Gear Standard for 14" & Larger



Dimensions and Weights										CLASS300
SIZE	in	2"	2.5"	3"	4"	6"	8"	10"	12"	14"
	mm	50	65	80	100	150	200	250	300	350
L/L1	in	10.50	11.50	12.50	14.00	17.50	22.00	24.50	28.00	33.00
	mm	267	292	318	356	445	559	622	711	838
L2	in	11.12	12.12	13.12	14.62	18.12	22.62	25.12	28.62	33.62
	mm	283	308	333	371	460	575	638	727	854
H	in	14.57	18.66	17.32	20.67	24.41	35.83	37.36	40.63	42.91
	mm	370	474	440	525	620	910	949	1032	1090
W	in	8	10	10	14	18	22	24	25	24
	mm	200	250	250	350	450	560	600	640	610
Weight RF	kg	28	48	56	82	154	240	319	632	975

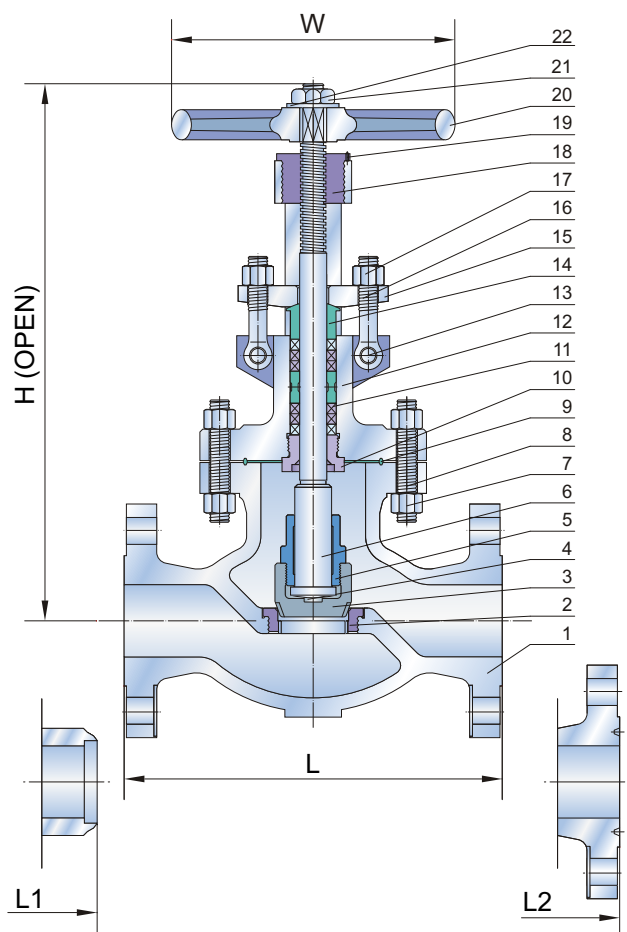

FEATURES

OS & Y, Rising Stem
Bolted Bonnet
Conic Disc
Extended Bonnet for Cryogenic Services
Impact Handwheel Optional
Gear Optional


SPECIFICATIONS

Design	ASME B16.34/BS 1873
Face to Face	ASME B16.10
End to End	ASME B16.10
End Flange	ASME B16.5
BW End	ASME B16.25
Test	API 598
Special	NACE MR-01-75


STANDARD MATERIALS OF PARTS

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105 + Stellite Faced
3	Disc	ASTM A105 + 13Cr Faced
4	Disc Thrust Plate	ASTM A276 Type 420
5	Disc Nut	ASTM A276 Type 410
6	Stem	ASTM A182 GR.F6a
7	Bonnet Bolt Nuts	ASTM A194 GR.2H
8	Bonnet Bolts	ASTM A193 GR.B7
9	Gasket, Ring Joint	Soft Iron
10	Backseat Bushing	ASTM A276 Type 410
11	Stem Packing	Braided Graphite & Die formed Graphite Ring
12	Bonnet	ASTM A216 GR.WCB
13	Eye Bolt Pins	Carbon Steel
14	Gland	ASTM A276 Type 410
15	Gland Flange	ASTM A216 GR.WCB
16	Gland Eye Bolts	ASTM A307 GR.B
17	Eye Bolt Nuts	ASTM A194 GR.2H
18	Yoke Bush	ASTM A439 GR.D-2
19	Screw	Carbon Steel
20	Handwheel	Ductile Iron
21	Handwheel Nut	ASTM A194 GR.2H
22	Washer	Carbon Steel
23	Lantern Ring On Request	ASTM A276 Type 410

Lantern Ring
On Request




Gear Standard
for 10" & Larger



Dimensions and Weights

SIZE	in	2"	2.5"	3"	4"	6"	8"	10"	CLASS 600
	mm	50	65	80	100	150	200	250	300
L/L1	in	11.50	13.00	14.00	17.00	22.00	26.00	31.00	33.00
	mm	292	330	356	432	559	660	787	838
L2	in	11.62	13.12	14.12	17.12	22.12	26.12	31.12	33.12
	mm	295	333	359	435	562	663	790	841
H	in	18.19	21.26	23.03	26.38	34.88	36.69	40.94	50.39
	mm	462	540	585	670	886	932	1040	1280
W	in	10	10	12	18	20	25	24	24
	mm	250	250	350	450	500	640	610	810
Weight RF	kg	36	70	85	123	404	450	700	900

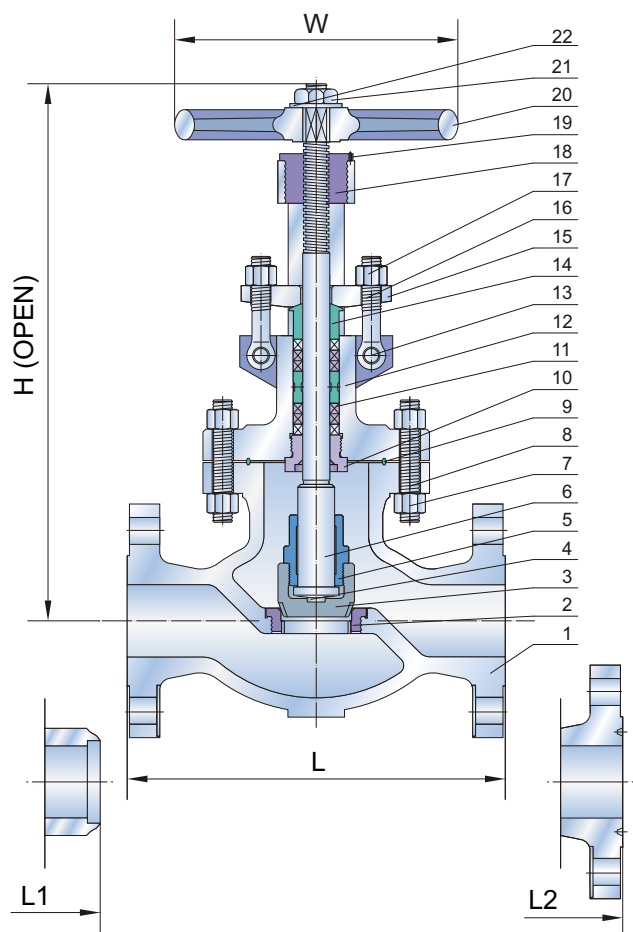

FEATURES

OS & Y, Rising Stem
Bolted Bonnet
Conic Disc
Extended Bonnet for Cryogenic Services
Impact Handwheel Optional
Gear Optional


SPECIFICATIONS

Design	ASME B16.34/BS 1873
Face to Face	ASME B16.10
End to End	ASME B16.10
End Flange	ASME B16.5
BW End	ASME B16.25
Test	API 598
Special	NACE MR-01-75


STANDARD MATERIALS OF PARTS

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105 + Stellite Faced
3	Disc	ASTM A105 + Stellite Faced
4	Disc Thrust Plate	ASTM A276 Type 420
5	Disc Nut	ASTM A276 Type 410
6	Stem	ASTM A182 GR.F6a
7	Bonnet Bolt Nuts	ASTM A194 GR.2H
8	Bonnet Bolts	ASTM A193 GR.B7
9	Gasket, Ring Joint	Soft Iron
10	Backseat Bushing	ASTM A276 Type 410
11	Stem Packing	Braided Graphite & Die formed Graphite Ring
12	Bonnet	ASTM A216 GR.WCB
13	Eye Bolt Pins	Carbon Steel
14	Gland	ASTM A276 Type 410
15	Gland Flange	ASTM A216 GR.WCB
16	Gland Eye Bolts	ASTM A307 GR.B
17	Eye Bolt Nuts	ASTM A194 GR.2H
18	Yoke Bush	ASTM A439 GR.D-2
19	Screw	Carbon Steel
20	Handwheel	Ductile Iron
21	Handwheel Nut	ASTM A194 GR.2H
22	Washer	Carbon Steel
23	Lantern Ring On Request	ASTM A276 Type 410

Lantern Ring
On Request





Gear Standard
for 6" & Larger




Dimensions and Weights								CLASS 900
SIZE	in	2"	2.5"	3"	4"	6"	8"	
	mm	50	65	80	100	150	200	
L/L1	in	14.50	16.50	15.00	18.00	24.00	29.00	
	mm	368	419	381	457	610	737	
L2	in	14.62	16.62	15.12	18.12	24.12	29.12	
	mm	371	422	384	460	613	740	
H	in	23.62	25.98	26.18	31.50	43.62	46.61	
	mm	600	660	665	800	1108	1184	
W	in	14	14	18	20	24	24	
	mm	350	350	450	500	610	610	
Weight RF	kg	95	138	122	195	435	730	

Dimensions and Weights								CLASS 2500
SIZE	in	2"	2.5"	3"	4"	6"	8"	
	mm	50	65	80	100	150	200	
L/L1	in	17.75	20.00	22.75	26.50	36.00	40.25	
	mm	451	508	578	673	914	1022	
L2	in	17.87	20.25	23.00	26.88	36.50	40.87	
	mm	454	514	584	683	927	1038	
H	in	28.35	31.50	34.84	49.61	75.00	97.05	
	mm	720	800	885	1260	1905	2465	
W	in	16	20	22	24	24	24	
	mm	400	500	560	600	610	610	
Weight RF	kg	176	264	308	759	1990	4390	

Dimensions and Weights								CLASS 1500
SIZE	in	2"	2.5"	3"	4"	6"	8"	
	mm	50	65	80	100	150	200	
L/L1	in	14.50	16.50	18.50	21.50	27.75	32.75	
	mm	368	419	470	546	705	832	
L2	in	14.62	16.62	18.62	21.62	28.00	33.13	
	mm	371	422	473	549	711	841	
H	in	25.98	25.98	30.31	33.46	45.08	52.95	
	mm	660	660	770	850	1145	1345	
W	in	14	14	20	22	24	24	
	mm	350	350	500	560	610	610	
Weight RF	kg	95	138	250	435	540	970	

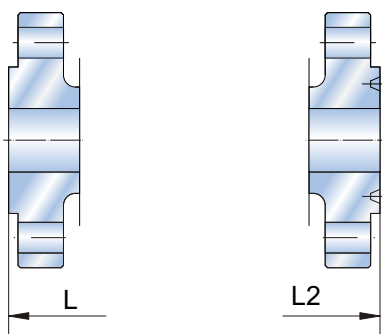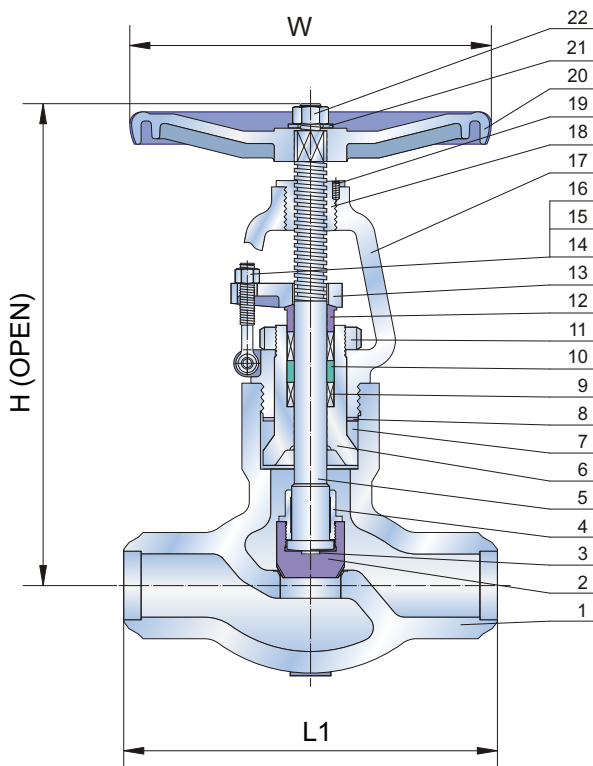

Gear Standard for
6" & Larger (900)
6" & Larger (1500)
4" & Larger (2500)

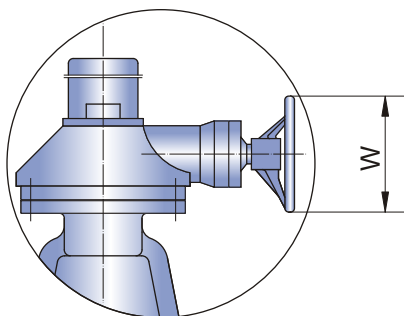

FEATURES

OS & Y, Rising Stem
Pressure Seal
Conic Disc
Backseat Weld-Deposited
By Pass On Request
Locking Device Optional
Gear Optional

SPECIFICATIONS

Design	ASME B16.34
Face to Face	ASME B16.10
End to End	ASME B16.10
End Flange	ASME B16.5
BW End	ASME B16.25
Test	API 598
Special	NACE MR-01-75

STANDARD MATERIALS OF PARTS

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB+Stellite Faced
2	Disc	ASTM A105+Stellite Faced
3	Disc Thrust Plate	ASTM A276 Type 420
4	Disc Nut	ASTM A276 Type 410
5	Stem	ASTM A182 GR.F6a
6	Bonnet	ASTM A216 Gr.WCB+Stellite Faced
7	Gasket	ASTM A182 GR.F304
8	Thrust Ring	ASTM A276 Type 410
9	Stem Packing	Braided Graphite & Die formed Graphite Ring
10	Lantern Ring	ASTM A276 Type 410
11	Bonnet Retainer	Carbon Steel
12	Gland	ASTM A276 Type 410
13	Gland Flange	ASTM A216 GR.WCB
14	Eye Bolt Pins	Carbon Steel
15	Gland Eye Bolts	ASTM A193 GR.B7
16	Eye Bolt Nuts	ASTM A194 GR.2H
17	Yoke	ASTM A216 GR.WCB
18	Yoke Bush	ASTM A439 GR.D-2
19	Screw	Carbon Steel
20	Handwheel	Ductile Iron
21	Washer	Carbon Steel
22	Handwheel Nut	ASTM A194 GR.2H

Dimensions and Weights CLASS 900							
SIZE	in	2"	2.5"	3"	4"	6"	8"
	mm	50	65	80	100	150	200
L/L1	in	14.50	16.50	15.00	18.00	24.00	29.00
	mm	368	419	381	457	610	737
L2	in	14.62	16.62	15.12	18.12	24.12	29.12
	mm	371	422	384	460	613	740
H	in	24.41	25.40	28.50	33.40	48.23	53.15
	mm	620	645	724	848	1225	1350
W	in	14	14	18	20	24	24
	mm	350	350	450	500	610	610
Weight BW	kg	62	86	86	140	380	948


Dimensions and Weights CLASS 1500							
SIZE	in	2"	2.5"	3"	4"	6"	8"
	mm	50	65	80	100	150	200
L/L1	in	14.50	16.50	18.50	21.50	27.75	32.75
	mm	368	419	470	546	705	832
L2	in	14.62	16.62	18.62	21.62	28.00	33.13
	mm	371	422	473	549	711	842
H	in	24.41	25.40	32.68	33.86	48.50	70.24
	mm	620	645	830	860	1232	1784
W	in	14	14	20	22	24	24
	mm	350	350	500	560	610	610
Weight BW	kg	62	86	112	158	765	1494

Dimensions and Weights CLASS 2500							
SIZE	in	2"	2.5"	3"	4"	6"	8"
	mm	50	65	80	100	150	200
L/L1	in	17.75	20.00	22.75	26.50	36.00	40.25
	mm	451	508	578	673	914	1022
L2	in	17.87	20.25	23.00	26.88	36.50	40.87
	mm	454	514	584	683	927	1038
H	in	24.41	30.63	34.84	51.10	53.74	83.46
	mm	620	778	885	1298	1365	2120
W	in	16	20	22	24	24	24
	mm	400	500	560	610	610	610
Weight BW	kg	80	115	152	358	965	2095

CAST STEEL GLOBE VALVE STANDARD MATERIALS OF PARTS

ITEM	PART NAME		CARBON STEEL			ALLOY STEEL			STAINLESS STEEL				
1	Body		A216 WCB	A352 LCB	A352 LCC	A217 WC1	A217 WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M	A351 CF8C
2	Seat Ring		A105	A350 LF2	A350 LF2	A182 F1	A182 F11	A182 F5	A182 F304	A182 F316	A182 F304L	A182 F316L	A182 F321
3	Disc		A105	A350 LF2	A350 LF2	A182 F1	A182 F11	A182 F5	A182 F304	A182 F316	A182 F304L	A182 F316L	A182 F321
4	Disc Thrust Plate		A276 420	A276 304	A276 304	A276 420			A276 304	A276 316	A276 304L	A276 316L	A276 321
5	Disc Nut		A276 410	A276 304	A276 304	A276 410			A276 304	A276 316	A276 304L	A276 316L	A276 321
6	Stem		A182 F6a	A182 F304	A182 F304	A182 F6a	A182 F6a	A182 F6a	A182 F304	A182 F316	A182 F304L	A182 F316L	A182 F321
7	Bonnet Bolt Nuts		A194 2H	A194 4	A194 4	A194 2H	A194 4	A194 4	A194 8				
8	Bonnet Bolts		A193 B7	A320 L7	A320 L7	A193 B7	A193 B16	A193 B16	A193 B8				
9	Gasket	CL150-600	Soft Iron +Graphite	304+Graphite	304+Graphite	304+Graphite		304+Graphite	316+Graphite				
		CL900-2500 Ring Joint	Soft Iron	304	304	304		304	316				
10	Backseat Bushing		A276 410	A276 304	A276 304	A276 410			A276 304	A276 316	A276 304L	A276 316L	A276 321
11	Stem Packing		Braided Graphite & Die formed Graphite Ring			Braided Graphite & Die formed Graphite Ring			Braided Graphite & Die formed Graphite Ring				
12	Bonnet		A216 WCB	A352 LCB	A352 LCC	A217 WC1	A217 WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M	A351 CF8C
13	Eye Bolt Pins		Carbon Steel			A276 410			Stainless Steel				
14	Gland		A276 410	A276 304	A276 304	A276 410			A276 304	A276 316	A276 304L	A276 316L	A276 321
15	Gland Flange		A216 WCB	A352 LCB	A352 LCC	A217 WC1	A217 WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M	A351 CF8C
16	Gland Eye Bolts		A307 B	A320 L7	A320 L7	A193 B7	A193 B16	A193 B16	A193 B8				
17	Eye Bolt Nuts		A194 2H	A194 4	A194 4	A194 2H	A194 4	A194 4	A194 8				
18	Yoke Bush		A439 D-2			A439 D-2			A439 D-2				
19	Screw		Carbon Steel			Carbon Steel			Stainless Steel				
20	Handwheel		Ductile Iron			Ductile Iron			Ductile Iron				
21	Handwheel Nut		A194 2H			A194 2H			Stainless Steel				
22	Washer		Carbon Steel			Carbon Steel			Stainless Steel				
23	Lantern Ring On Request		A276 410	A276 304	A276 304	A276 410			A276 304	A276 316	A276 304L	A276 316L	A276 321

CLASS 150 300 RF

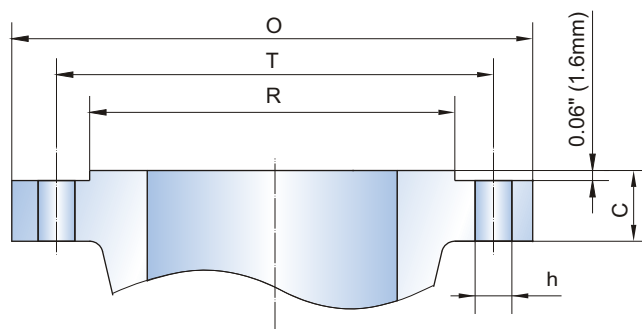

CLASS	SIZE		O		R		C		T		h		Bolt	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	QTY.	Diameter
150	2	50	6.00	152	3.62	92	0.62	16	4.75	120.5	0.75	19	4	5/8
	2 1/2	65	7.00	178	4.12	105	0.69	18	5.50	139.5	0.75	19	4	5/8
	3	80	7.50	190	5.00	127	0.75	19	6.00	152.5	0.75	19	4	5/8
	4	100	9.00	229	6.19	157	0.94	24	7.50	190.5	0.75	19	8	5/8
	6	150	11.00	279	8.50	216	1.00	26	9.50	241.5	0.88	22	8	3/4
	8	200	13.50	343	10.62	270	1.12	29	11.75	298.5	0.88	22	8	3/4
	10	250	16.00	406	12.75	324	1.19	31	14.25	362	1.00	25	12	7/8
	12	300	19.00	483	15.00	381	1.25	32	17.00	432	1.00	25	12	7/8
	14	350	21.00	533	16.25	413	1.38	35	18.75	476	1.12	29	12	1
	16	400	23.50	597	18.50	470	1.44	37	21.25	540	1.12	29	16	1
	18	450	25.00	635	21.00	533	1.56	40	22.75	578	1.25	32	16	1 1/8
	20	500	27.50	699	23.00	584	1.69	43	25.00	635	1.25	32	20	1 1/8
	24	600	32.00	813	27.25	692	1.88	48	29.50	749.5	1.38	35	20	1 1/4
	26	650	34.25	870	29.50	749	2.69	69	31.75	806.5	1.38	35	24	1 1/4
	28	700	36.50	927	31.50	800	2.81	72	34.00	863.5	1.38	35	28	1 1/4
	30	750	38.75	984	33.75	857	2.94	75	36.00	914.5	1.38	35	28	1 1/4
	32	800	41.75	1060	36.00	914	3.19	81	38.50	978	1.62	41	28	1 1/2
	36	900	46.00	1168	40.25	1022	3.56	91	42.75	1086	1.62	41	32	1 1/2
300	40	1000	50.75	1289	44.25	1124	3.56	91	47.25	1200	1.62	41	36	1 1/2
	42	1050	53.00	1346	47.00	1194	3.81	97	49.50	1257.5	1.62	41	36	1 1/2
	48	1200	59.50	1511	53.50	1359	4.25	108	56.00	1422.5	1.62	41	44	1 1/2
	2	50	6.50	165	3.62	92	0.88	23	5.00	127	0.75	19	8	5/8
	2 1/2	65	7.50	190	4.12	105	1.00	26	5.88	149	0.88	22	8	3/4
	3	80	8.25	210	5.00	127	1.12	29	6.62	168.5	0.88	22	8	3/4
	4	100	10.00	254	6.19	157	1.25	32	7.88	200	0.88	22	8	3/4
	6	150	12.50	318	8.50	216	1.44	37	10.62	270	0.88	22	12	3/4
	8	200	15.00	381	10.62	270	1.62	42	13.00	330	1.00	25	12	7/8
	10	250	17.50	445	12.75	324	1.88	48	15.25	387.5	1.12	29	16	1
	12	300	20.50	521	15.00	381	2.00	51	17.75	451	1.25	32	16	1 1/8
	14	350	23.00	584	16.25	413	2.12	54	20.25	514.5	1.25	32	20	1 1/8
	16	400	25.50	648	18.50	470	2.25	58	22.50	571.5	1.38	35	20	1 1/4
	18	450	28.00	711	21.00	533	2.38	61	24.75	628.5	1.38	35	24	1 1/4
	20	500	30.50	775	23.00	584	2.50	64	27.00	686	1.38	35	24	1 1/4
	24	600	36.00	914	27.25	692	2.75	70	32.00	813	1.62	41	24	1 1/2
	26	650	38.25	972	29.50	749	3.12	80	34.50	876.5	1.75	45	28	1 5/8
	28	700	40.75	1035	31.50	800	3.38	86	37.00	940	1.75	45	28	1 5/8
	30	750	43.00	1092	33.75	857	3.62	92	39.25	997	1.88	48	28	1 3/4
	32	800	45.25	1149	36.00	914	3.88	98	41.50	1054	2.00	51	28	1 7/8
	36	900	50.00	1270	40.25	1022	4.12	105	46.00	1168.5	2.12	54	32	2

End Flange Dimensions:

Size 2"-24" to ASME B16.5, Size 26"-48" to ASME B16.47 A.

Tolerances: Unit inch

Thickness C:

NPS ≤ 18" +0.12, -0

NPS ≥ 20" +0.19, -0

Drilling and Facing:

Bolt Circle Diameter h: ± 0.06

Center to Center of Adjacent Bolt Holes: ± 0.03

Eccentricity Between Bolt Circle Diameter and Machined Facing Diameters:

NPS ≤ 2 1/2" ± 0.03

NPS ≥ 3" ± 0.06

Outside Diameter R:


0.06 Raised Face: NPS 2"-24" ± 0.03

0.25 Raised Face: NPS 2"-24" ± 0.02

NPS ≥ 26" ± 0.08

NPS ≥ 26" ± 0.04

CLASS 600-2500 RF

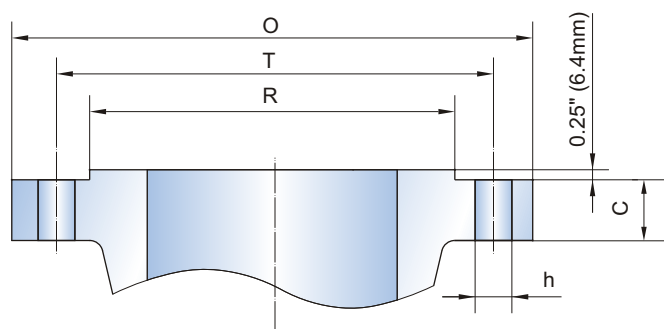


CLASS	SIZE		O		R		C		T		h		Bolt	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	QTY.	Diameter
600	2	50	6.50	165	3.62	92	1.00	26	5.00	127	0.75	19	8	5/8
	2 1/2	65	7.50	190	4.12	105	1.12	29	5.88	149	0.88	22	8	3/4
	3	80	8.25	210	5.00	127	1.25	32	6.62	168	0.88	22	8	3/4
	4	100	10.75	273	6.19	157	1.50	38	8.50	216	1.00	25	8	7/8
	6	150	14.00	356	8.50	216	1.88	48	11.50	292	1.12	29	12	1
	8	200	16.50	419	10.62	270	2.19	56	13.75	349	1.25	32	12	1 1/8
	10	250	20.00	508	12.75	324	2.50	64	17.00	432	1.38	35	16	1 1/4
	12	300	22.00	559	15.00	381	2.62	67	19.25	489	1.38	35	20	1 1/4
	14	350	23.75	603	16.25	413	2.75	70	20.75	527	1.50	38	20	1 3/8
	16	400	27.00	686	18.50	470	3.00	77	23.75	603	1.62	41	20	1 1/2
	18	450	29.25	743	21.00	533	3.25	83	25.75	654	1.75	44	20	1 5/8
	20	500	32.00	813	23.00	584	3.50	89	28.50	724	1.75	44	24	1 5/8
	24	600	37.00	940	27.25	692	4.00	102	33.00	838	2.00	51	24	1 7/8
900	2	50	8.50	216	3.62	92	1.50	38.5	6.50	165.1	1.00	26	8	7/8
	2 1/2	65	9.62	244	4.12	105	1.62	41.5	7.50	190.5	1.12	29	8	1
	3	80	9.50	241	5.00	127	1.50	38.5	7.50	190.5	1.00	26	8	7/8
	4	100	11.50	292	6.19	157	1.75	44.5	9.25	234.9	1.25	32	8	1 1/8
	6	150	15.00	381	8.50	216	2.19	56.0	12.50	317.5	1.25	32	12	1 1/8
	8	200	18.50	470	10.62	270	2.50	63.5	15.50	393.7	1.50	39	12	1 3/8
	10	250	21.50	545	12.75	324	2.75	70.0	18.50	469.9	1.50	39	16	1 3/8
	12	300	24.00	610	15.00	381	3.12	79.5	21.00	533.4	1.50	39	20	1 3/8
	14	350	25.25	640	16.25	413	3.38	86.0	22.00	558.8	1.62	42	20	1 1/2
	16	400	27.75	705	18.50	470	3.50	89.0	24.25	615.9	1.75	45	20	1 5/8
	18	450	31.00	785	21.00	533	4.00	102.0	27.00	685.8	2.00	51	20	1 7/8
	20	500	33.75	855	23.00	584	4.25	108.0	29.50	749.3	2.12	54	20	2
	24	600	41.00	1040	27.25	692	5.50	140.0	35.50	901.7	2.62	67	20	2 1/2
1500	2	50	8.50	216	3.62	92	1.50	38.5	6.50	165.1	1.00	26	8	7/8
	2 1/2	65	9.62	244	4.12	105	1.62	41.5	7.50	190.5	1.12	29	8	1
	3	80	10.50	267	5.00	127	1.88	48.0	8.00	203.2	1.25	32	8	1 1/8
	4	100	12.25	311	6.19	157	2.12	54.0	9.50	241.3	1.38	35	8	1 1/4
	6	150	15.50	394	8.50	216	3.25	83.0	12.50	317.5	1.50	39	12	1 3/8
	8	200	19.00	483	10.62	270	3.62	92.9	15.50	393.7	1.75	45	12	1 5/8
	10	250	23.00	585	12.75	324	4.25	108.0	19.00	482.6	2.00	51	12	1 7/8
	12	300	26.50	675	15.00	381	4.88	124.0	22.50	571.5	2.12	54	16	2
	14	350	29.50	750	16.25	413	5.25	133.5	25.00	635.0	2.38	61	16	2 1/4
	16	400	32.50	825	18.50	470	5.75	146.5	27.75	704.8	2.62	67	16	2 1/2
	18	450	36.00	915	21.00	533	6.38	162.0	30.50	774.7	2.88	74	16	2 3/4
	20	500	38.75	985	23.00	584	7.00	178.0	32.75	831.8	3.12	80	16	3
	24	600	46.00	1170	27.25	692	8.00	203.5	39.00	990.6	3.62	93	16	3 1/2
2500	2	50	9.25	235	3.62	92	2.00	51.0	6.75	171.4	1.12	29	8	1
	2 1/2	65	10.50	267	4.12	105	2.25	57.5	7.75	196.8	1.25	32	8	1 1/8
	3	80	12.00	305	5.00	127	2.62	67.0	9.00	228.6	1.38	35	8	1 1/4
	4	100	14.00	356	6.19	157	3.00	76.5	10.75	273.0	1.62	42	8	1 1/2
	6	150	19.00	483	8.50	216	4.25	108.0	14.50	368.3	2.12	54	8	2
	8	200	21.75	550	10.62	270	5.00	127.0	17.25	438.1	2.12	54	12	2
	10	250	26.50	675	12.75	324	6.50	165.5	21.25	539.7	2.62	67	12	2 1/2
	12	300	30.00	760	15.00	381	7.25	184.5	24.38	619.1	2.88	74	12	2 3/4

End Flange Dimensions: ASME B16.5

Tolerances: the Same as Class 150 300

CLASS 150-2500 RTJ

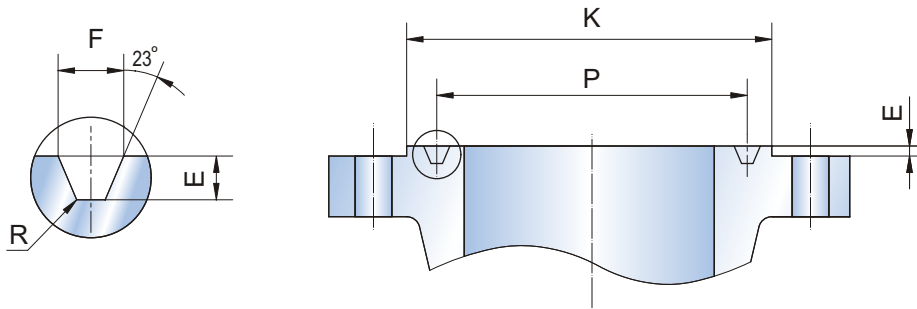

CLASS	SIZE		Ring No.	P		E		F		R		K	
	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm
150	2	50	R22	3.250	82.55	0.250	6.35	0.344	8.74	0.03	0.8	4.00	102
	2 1/2	65	R25	4.000	101.60	0.250	6.35	0.344	8.74	0.03	0.8	4.75	121
	3	80	R29	4.500	114.30	0.250	6.35	0.344	8.74	0.03	0.8	5.25	133
	4	100	R36	5.875	149.22	0.250	6.35	0.344	8.74	0.03	0.8	6.75	171
	6	150	R43	7.625	193.68	0.250	6.35	0.344	8.74	0.03	0.8	8.62	219
	8	200	R48	9.750	247.65	0.250	6.35	0.344	8.74	0.03	0.8	10.75	273
	10	250	R52	12.000	304.80	0.250	6.35	0.344	8.74	0.03	0.8	13.00	330
	12	300	R56	15.000	381.00	0.250	6.35	0.344	8.74	0.03	0.8	16.00	406
	14	350	R59	15.625	396.88	0.250	6.35	0.344	8.74	0.03	0.8	16.75	425
	16	400	R64	17.875	454.02	0.250	6.35	0.344	8.74	0.03	0.8	19.00	483
	18	450	R68	20.375	517.52	0.250	6.35	0.344	8.74	0.03	0.8	21.50	546
	20	500	R72	22.000	558.80	0.250	6.35	0.344	8.74	0.03	0.8	23.50	597
	24	600	R76	26.500	673.10	0.250	6.35	0.344	8.74	0.03	0.8	28.00	711
300 600	2	50	R23	3.250	82.55	0.312	7.92	0.469	11.91	0.03	0.8	4.25	108
	2 1/2	65	R26	4.000	101.60	0.312	7.92	0.469	11.91	0.03	0.8	5.00	127
	3	80	R31	4.875	123.82	0.312	7.92	0.469	11.91	0.03	0.8	5.75	146
	4	100	R37	5.875	149.22	0.312	7.92	0.469	11.91	0.03	0.8	6.88	175
	6	150	R45	8.312	211.13	0.312	7.92	0.469	11.91	0.03	0.8	9.50	241
	8	200	R49	10.625	269.88	0.312	7.92	0.469	11.91	0.03	0.8	11.88	302
	10	250	R53	12.750	323.85	0.312	7.92	0.469	11.91	0.03	0.8	14.00	356
	12	300	R57	15.000	381.00	0.312	7.92	0.469	11.91	0.03	0.8	16.25	413
	14	350	R61	16.500	419.10	0.312	7.92	0.469	11.91	0.03	0.8	18.00	457
	16	400	R65	18.500	469.90	0.312	7.92	0.469	11.91	0.03	0.8	20.00	508
	18	450	R69	21.000	533.40	0.312	7.92	0.469	11.91	0.03	0.8	22.62	575
	20	500	R73	23.000	584.20	0.375	9.52	0.531	13.49	0.06	1.5	25.00	635
	24	600	R77	27.250	692.15	0.438	11.13	0.656	16.66	0.06	1.5	29.50	749
	26	650	R93	29.500	749.30	0.500	12.7	0.781	19.84	0.06	1.5	31.88	861
	28	700	R94	31.500	800.10	0.500	12.7	0.781	19.84	0.06	1.5	33.88	861
	30	750	R95	33.750	857.25	0.500	12.7	0.781	19.84	0.06	1.5	36.12	917
	32	800	R96	36.000	914.40	0.562	14.27	0.906	23.01	0.06	1.5	38.75	984
	36	900	R98	40.250	1022.35	0.562	14.27	0.906	23.01	0.06	1.5	43.00	1092

CLASS	SIZE		Ring No.	P		E		F		R		K	
	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm
900	2	50	R24	3.750	95.25	0.312	7.92	0.469	11.91	0.03	0.8	4.88	124
	2 1/2	65	R27	4.250	107.95	0.312	7.92	0.469	11.91	0.03	0.8	5.38	137
	3	80	R31	4.875	123.82	0.312	7.92	0.469	11.91	0.03	0.8	6.12	156
	4	100	R37	5.875	149.22	0.312	7.92	0.469	11.91	0.03	0.8	7.12	181
	6	150	R45	8.312	211.12	0.312	7.92	0.469	11.91	0.03	0.8	9.50	241
	8	200	R49	10.625	269.88	0.312	7.92	0.469	11.91	0.03	0.8	12.12	308
	10	250	R53	12.750	323.85	0.312	7.92	0.469	11.91	0.03	0.8	14.25	362
	12	300	R57	15.000	381.00	0.312	7.92	0.469	11.91	0.03	0.8	16.50	419
	14	350	R62	16.500	419.10	0.438	11.13	0.656	16.66	0.06	1.5	18.38	467
	16	400	R66	18.500	469.90	0.438	11.13	0.656	16.66	0.06	1.5	20.62	524
	18	450	R70	21.000	533.40	0.500	12.7	0.781	19.84	0.06	1.5	23.38	594
	20	500	R74	23.000	584.20	0.500	12.7	0.781	19.84	0.06	1.5	25.50	648
	24	600	R78	27.250	692.15	0.625	15.88	1.062	26.97	0.09	2.3	30.38	772
1500	2	50	R24	3.750	95.25	0.312	7.92	0.469	11.91	0.03	0.8	4.88	124
	2 1/2	65	R27	4.250	107.95	0.312	7.92	0.469	11.91	0.03	0.8	5.38	137
	3	80	R35	5.375	136.52	0.312	7.92	0.469	11.91	0.03	0.8	6.62	168
	4	100	R39	6.375	161.92	0.312	7.92	0.469	11.91	0.03	0.8	7.62	194
	6	150	R46	8.312	211.12	0.375	9.52	0.531	13.49	0.06	1.5	9.75	248
	8	200	R50	10.625	269.88	0.438	11.13	0.656	16.66	0.06	1.5	12.50	318
	10	250	R54	12.750	323.85	0.438	11.13	0.656	16.66	0.06	1.5	14.62	371
	12	300	R58	15.000	381.00	0.562	14.27	0.906	23.01	0.06	1.5	17.25	438
	14	350	R63	16.500	419.10	0.625	15.88	1.062	26.97	0.09	2.3	19.25	489
	16	400	R67	18.500	469.90	0.688	17.48	1.188	30.18	0.09	2.3	21.50	546
	18	450	R71	21.000	533.40	0.688	17.48	1.188	30.18	0.09	2.3	24.12	613
	20	500	R75	23.000	584.20	0.688	17.48	1.312	33.32	0.09	2.3	26.50	673
	24	600	R79	27.250	692.15	0.812	20.62	1.438	36.53	0.09	2.3	31.25	794
2500	2	50	R26	4.000	101.60	0.312	7.92	0.469	11.91	0.03	0.8	5.25	133
	2 1/2	65	R28	4.375	111.12	0.375	9.52	0.531	13.49	0.03	0.8	5.88	149
	3	80	R32	5.000	127.00	0.375	9.52	0.531	13.49	0.06	1.5	6.62	168
	4	100	R38	6.188	157.18	0.438	11.13	0.656	16.66	0.06	1.5	8.00	203
	6	150	R47	9.000	228.60	0.500	12.70	0.781	19.84	0.06	1.5	11.00	279
	8	200	R51	11.000	279.40	0.562	14.27	0.906	23.01	0.06	1.5	13.38	340
	10	250	R55	13.500	342.90	0.688	17.48	1.188	30.18	0.09	2.3	16.75	425
	12	300	R60	16.000	406.40	0.688	17.48	1.312	33.32	0.09	2.3	19.50	495

End Flange Dimensions:

Size 2"-24" to ASME B16.5, Size 26"-36" to ASME B16.47 A .

Tolerances: Unit inch

Depth E: + 0.016, -0


Width F: ± 0.008

Pith Diameter P: ± 0.005


Radius at Bottom R: $R \leq 0.06$ +0.03, -0

$R > 0.06$ ± 0.03

Angle 23 Deg.: ± 0.5 Deg.



Note 1 Internal surface may be as formed or machined for dimension B at root face. Contour within the envelope shall be in accordance with section.



Wall Thickness not Over 0.88in (22mm)
Welding End Detail for Joint Without Backing Ring

Wall Thickness Over 0.88in (22mm)
Welding End Detail for Joint Without Backing Ring

Nominal Pipe Size		Schedule No. [Note(1)]	O.D. at Welding Ends				B		C [Note(3)]		t	
			Wrought or Fabricated Components,A [Note(1)]		Cast Steel Valves, A [Note(2)]							
DN	NPS		mm	in	mm	in	mm	in	mm	in	mm	in
65	2 1/2	40	73.0	2.88	75	2.96	62.5	2.469	62.93	2.479	5.16	0.203
		80					59	2.323	59.69	2.351	7.01	0.276
		160					54	2.125	55.28	2.178	9.53	0.375
		XXS					45	1.771	47.43	1.868	14.02	0.552
80	3	40	88.9	3.50	91	3.59	78	3.068	78.25	3.081	5.49	0.216
		80					73.5	2.900	74.53	2.934	7.62	0.300
		160					66.5	2.624	68.38	2.692	11.13	0.438
		XXS					58.5	2.300	61.19	2.409	15.24	0.600
90	3 1/2	40	101.6	4.00	105	4.12	90	3.548	90.52	3.564	5.74	0.226
		80					85.5	3.364	86.42	3.402	8.08	0.318
100	4	40	114.3	4.50	117	4.62	102	4.026	102.73	4.044	6.02	0.237
		80					97	3.826	98.28	3.869	8.56	0.337
		120					92	3.624	93.78	3.692	11.13	0.438
		160					87.5	3.438	89.65	3.530	13.49	0.531
		XXS					80	3.152	83.30	3.279	17.12	0.674
125	5	40	141.3	5.56	144	5.69	128	5.047	128.80	5.070	6.55	0.258
		80					122	4.813	123.58	4.866	9.53	0.375
		120					116	4.563	118.04	4.647	12.70	0.500
		160					109.5	4.313	112.47	4.428	15.88	0.625
		XXS					103	4.063	106.92	4.209	19.05	0.750
150	6	40	168.3	6.62	172	6.78	154	6.065	154.82	6.094	7.11	0.280
		80					146.5	5.761	148.06	5.828	10.97	0.432
		120					140	5.501	142.29	5.600	14.27	0.562
		160					132	5.187	135.31	5.326	18.26	0.719
		XXS					124.5	4.897	128.85	5.072	21.95	0.864
200	8	40	219.1	8.62	223	8.78	203	7.981	203.75	8.020	8.18	0.322
		60					198.5	7.813	200.02	7.873	10.31	0.406
		80					193.5	7.625	195.84	7.709	12.70	0.500
		100					189	7.437	191.65	7.544	15.09	0.594
		120					182.5	7.187	186.11	7.326	18.26	0.719
		140					178	7.001	181.98	7.163	20.62	0.812
		XXS					174.5	6.875	179.16	7.053	22.23	0.875
		160					173	6.813	177.79	6.998	23.01	0.906
250	10	40	273.0	10.75	278	10.94	254.5	10.020	255.74	10.070	9.27	0.365
		60					247.5	9.750	249.74	9.834	12.70	0.500
		80					243	9.562	245.55	9.670	15.09	0.594
		100					236.5	9.312	240.01	9.451	18.26	0.719
		120					230	9.062	234.44	9.232	21.44	0.844
		140					222	8.750	227.51	8.959	25.40	1.000
		160					216	8.500	221.95	8.740	28.58	1.125
300	12	STD	323.8	12.75	329	12.97	305	12.000	306.08	12.053	9.53	0.375
		40					303	11.938	304.72	11.999	10.31	0.406
		XS					298.5	11.750	300.54	11.834	12.70	0.500
		60					295	11.626	297.79	11.725	14.27	0.562
		80					289	11.374	292.17	11.505	17.48	0.688
		100					281	11.062	285.24	11.232	21.44	0.844
		120					273	10.750	278.31	10.959	25.40	1.000
		140					266.5	10.500	272.75	10.740	28.58	1.125
		160					257	10.126	264.45	10.413	33.32	1.312
350	14	STD	355.6	14.00	362	14.25	336.5	13.250	337.88	13.303	9.53	0.375
		40					333.5	13.124	335.08	13.192	11.13	0.438
		XS					330	13.000	332.34	13.084	12.70	0.500
		60					325.5	12.812	328.15	12.920	15.09	0.594
		80					317.5	12.500	321.22	12.646	19.05	0.750
		100					308	12.124	312.86	12.318	23.83	0.938
		120					300	11.812	305.93	12.044	27.79	1.094
		140					292	11.500	299.00	11.771	31.75	1.250
		160					284	11.188	292.07	11.498	35.71	1.406

Nominal Pipe Size		Schedule No. [Note(1)]	O.D. at Welding Ends				B		C [Note(3)]		t	
			Wrought or Fabricated Components, A [Note(1)]		Cast Steel Valves, A [Note(2)]							
DN	NPS		mm	in	mm	in	mm	in	mm	in	mm	in
400	16	STD	406.4	16.00	413	16.25	387.5	15.250	388.68	15.303	9.53	0.375
		40					381	15.000	383.14	15.084	12.70	0.500
		60					373	14.688	376.21	14.811	16.66	0.656
		80					363.5	14.312	367.84	14.482	21.44	0.844
		100					354	13.938	359.53	14.155	26.19	1.031
		120					344.5	13.562	351.18	13.826	30.96	1.219
		140					333.5	13.124	341.43	13.422	36.53	1.438
		160					325.5	12.812	334.50	13.170	40.49	1.594
450	18	STD	457.2	18.00	464	18.28	438	17.250	439.48	17.303	9.53	0.375
		XS					432	17.000	433.94	17.084	12.70	0.500
		40					428.5	16.876	431.19	16.975	14.27	0.562
		60					419	16.500	422.82	16.646	19.05	0.750
		80					409.5	16.124	414.46	16.318	23.83	0.938
		100					398.5	15.688	404.78	15.936	29.36	1.156
		120					387.5	15.250	395.03	15.553	34.93	1.375
		140					378	14.876	386.77	15.225	39.67	1.562
500	20	STD	508.0	20.00	516	20.31	489	19.250	490.28	19.303	9.53	0.375
		XS					482.5	19.000	484.74	19.084	12.70	0.500
		40					478	18.812	480.55	18.920	15.09	0.594
		60					467	18.376	470.88	18.538	20.62	0.812
		80					455.5	17.938	461.13	18.155	26.19	1.031
		100					443	17.438	450.02	17.717	32.54	1.281
		120					432	17.000	440.29	17.334	38.10	1.500
		140					419	16.500	429.17	16.896	44.45	1.750
550	22	STD	558.8	22.00	567	22.34	539	21.250	541.08	21.303	9.53	0.375
		XS					533	21.000	535.54	21.084	12.70	0.500
		60					514	20.250	518.86	20.428	22.23	0.875
		80					501	19.750	507.75	19.990	28.58	1.125
		100					488.5	19.250	496.63	19.553	34.93	1.375
		120					476	18.750	485.52	19.115	41.28	1.625
		140					463	18.250	474.41	18.678	47.63	1.875
		160					450.5	17.750	463.30	18.240	53.98	2.125
600	24	STD	609.6	24.00	619	24.38	590.5	23.250	591.88	23.303	9.53	0.375
		XS					584	23.000	586.34	23.084	12.70	0.500
		30					581	22.876	583.59	22.975	14.27	0.562
		40					574.5	22.624	577.97	22.755	17.48	0.688
		60					560.5	22.062	565.49	22.263	24.61	0.969
		80					547.5	21.562	554.38	21.826	30.96	1.219
		100					532	20.938	540.49	21.280	38.89	1.531
		120					517.5	20.376	528.03	20.788	46.02	1.812
650	26	STD	650.0	25.59	660.0	26.00	635	25.000	637.14	25.084	12.70	0.500
		XS					628.5	24.750	630.63	24.844	12.70	0.500
		30					625	24.609	627.14	24.700	12.70	0.500
		40					618	24.331	620.14	24.411	12.70	0.500
		60					604	23.780	609.14	23.961	12.70	0.500
		80					590	23.229	595.14	23.410	12.70	0.500
		100					576	22.678	581.14	22.859	12.70	0.500
		120					562	22.127	567.14	22.308	12.70	0.500
700	28	STD	700.0	27.48	710.0	27.89	685	26.969	687.14	27.050	12.70	0.500
		XS					678	26.700	680.14	26.791	12.70	0.500
		30					675	26.575	677.14	26.666	12.70	0.500
		40					668	26.306	670.14	26.397	12.70	0.500
750	30	STD	750.0	29.53	760.0	29.92	735	28.923	737.14	29.004	12.70	0.500
		XS					728	28.654	730.14	28.745	12.70	0.500
		30					725	28.529	727.14	28.620	12.70	0.500
		40					718	28.260	720.14	28.351	12.70	0.500
800	32	STD	800.0	31.50	810.0	31.89	785	30.873	787.14	30.954	12.70	0.500
		XS					778	30.604	780.14	30.745	12.70	0.500
		30					775	30.479	777.14	30.660	12.70	0.500
		40					768	30.210	770.14	30.551	12.70	0.500
850	34	STD	850.0	33.46	860.0	33.85	835	32.823	837.14	32.904	12.70	0.500
		XS					828	32.554	830.14	32.795	12.70	0.500
		30					825	32.429	827.14	32.610	12.70	0.500
		40					818	32.160	820.14	32.501	12.70	0.500
900	36	STD	900.0	35.43	910.0	35.81	885	34.823	887.14	34.904	12.70	0.500
		XS					878	34.554	880.14	34.795	12.70	0.500
		30					875	34.429	877.14	34.610	12.70	0.500
		40					868	34.160	870.14	34.501	12.70	0.500

NOTES:

(1) Letter designations signify

(a) STD = standard wall thickness

(b) XS = extra-strong wall thickness

(c) XXS = double extra-strong wall thickness

(2) The diameters listed are not requirements. They are provided for the convenience of the user.

(3) Internal machining for continuous backing rings for sizes DN 50 (NPS 2) and smaller is not contemplated.