




PRODUCT SOLUTION

TRIPLE OFFSET BUTTERFLY VALVE

Engineered for critical isolation service

Premium technical presentation for industrial valve supply, procurement and project coordination across Latin American energy markets.

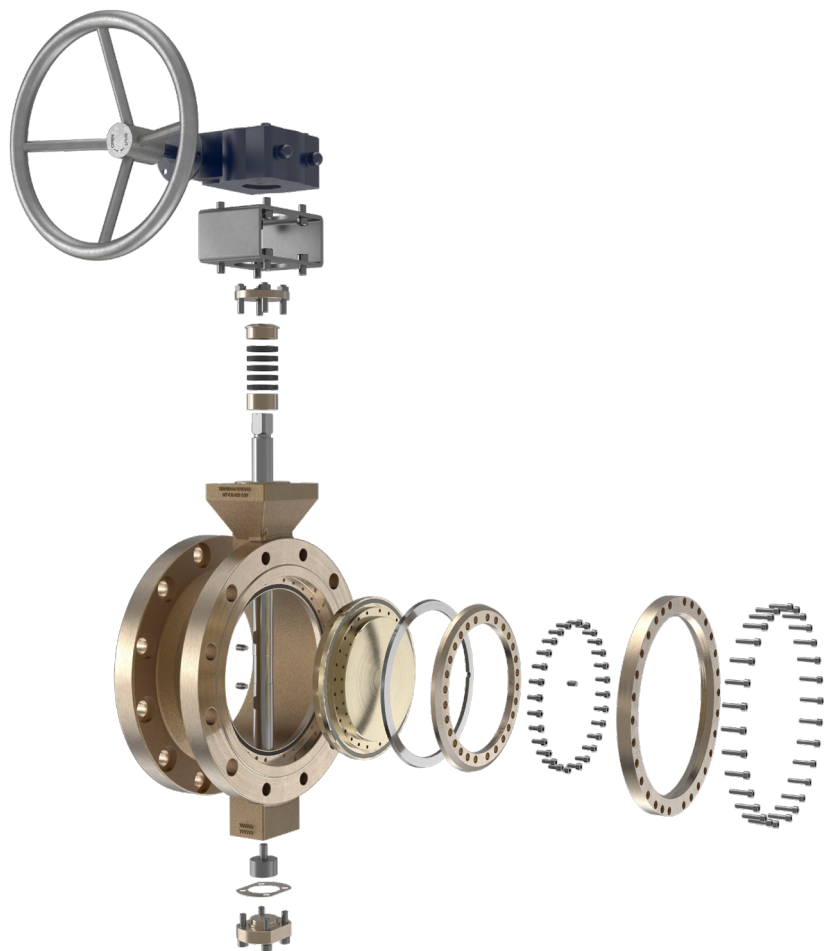

Intentionally left blank

INTRODUCTION



INTRODUCTION


Butterfly valve uses a stem through an approximate circular plate of the disc and the valve stem rotation to drive

SCOPE OF PRODUCTS


Legends: **A** –Triple Offset

Size in/mm	Class 150 PN 20	Class 300 PN 50	Class 600 PN 100	Class 900 PN 150	Class 1500 PN 250
2 50	A	A	A	A	A
3 65	A	A	A	A	A
4 80	A	A			

OVERVIEW (Triple Offset Type)

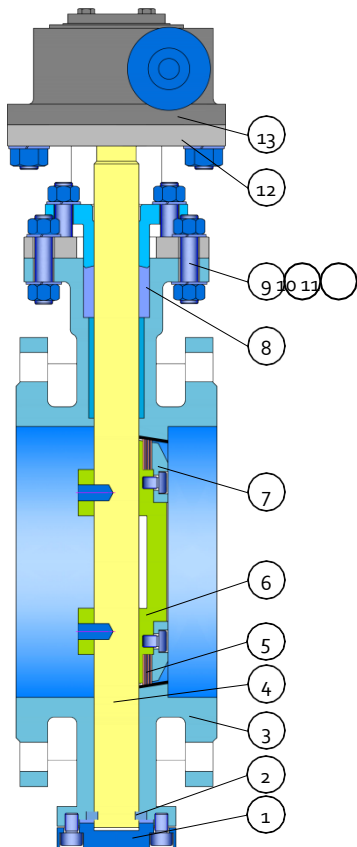

OVERVIEW (Triple Offset Type)

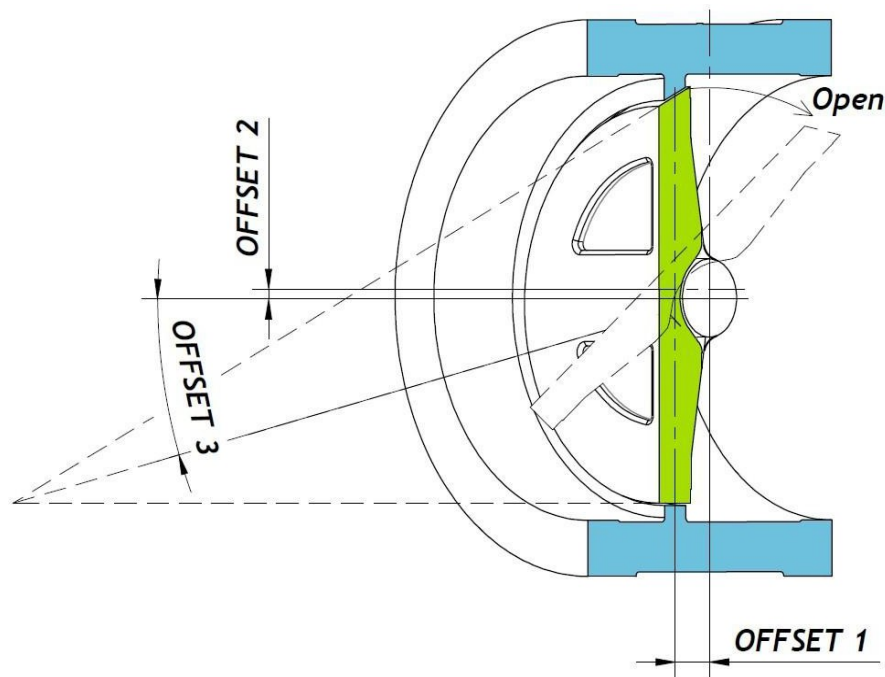


Offset 1: Offset for seat seal and the rotation center of stem.

Offset 2: Center of pipe and disc.


DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 150 (PN 20)

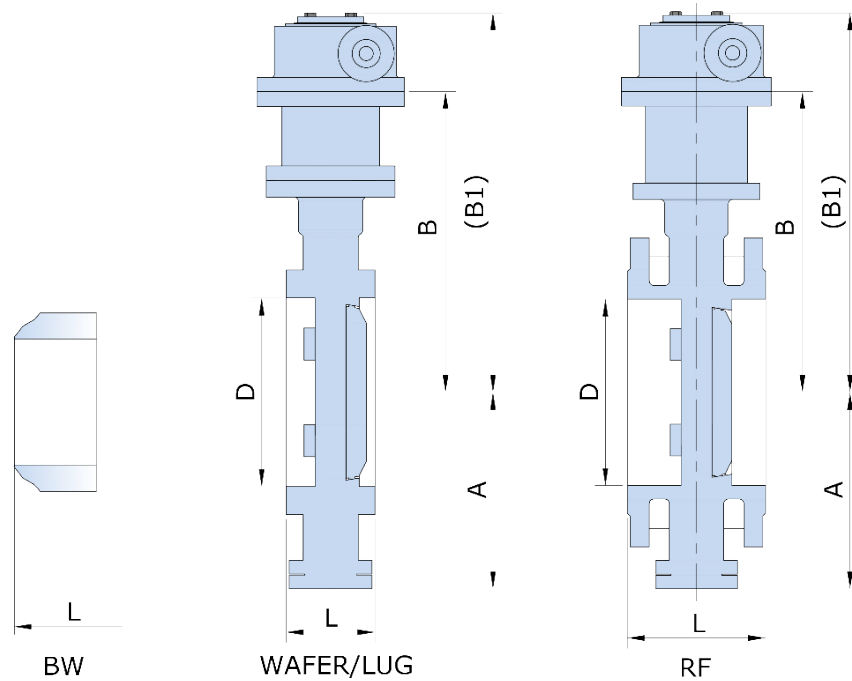


DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 150 (PN 20)

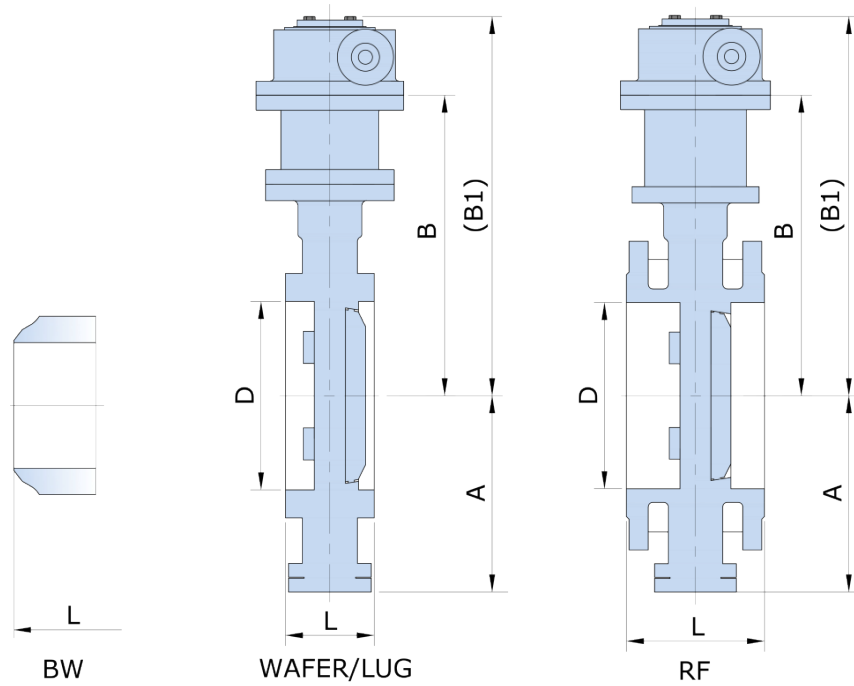


DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 300 (PN 50)

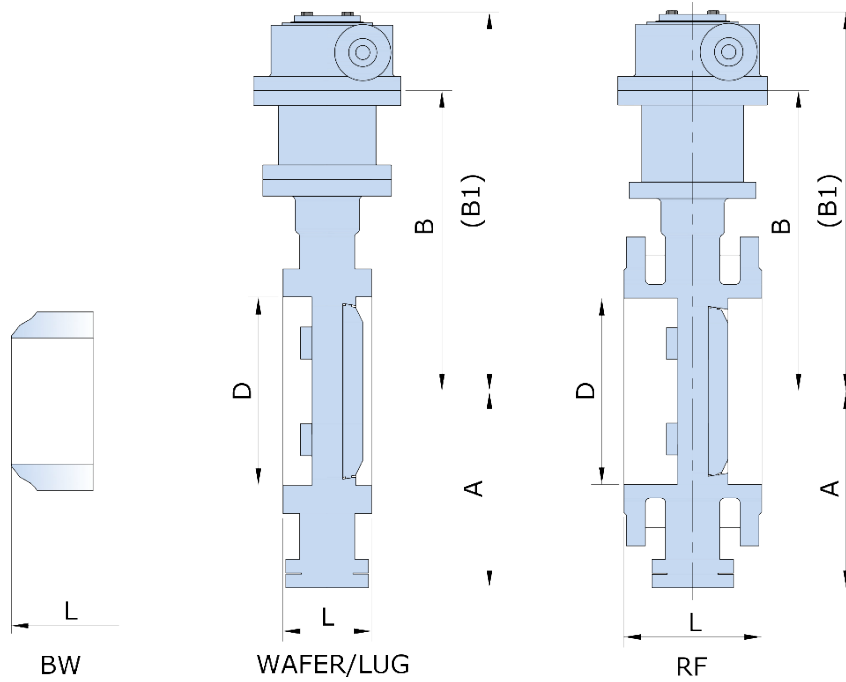


DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 600/900 (PN 100/150)

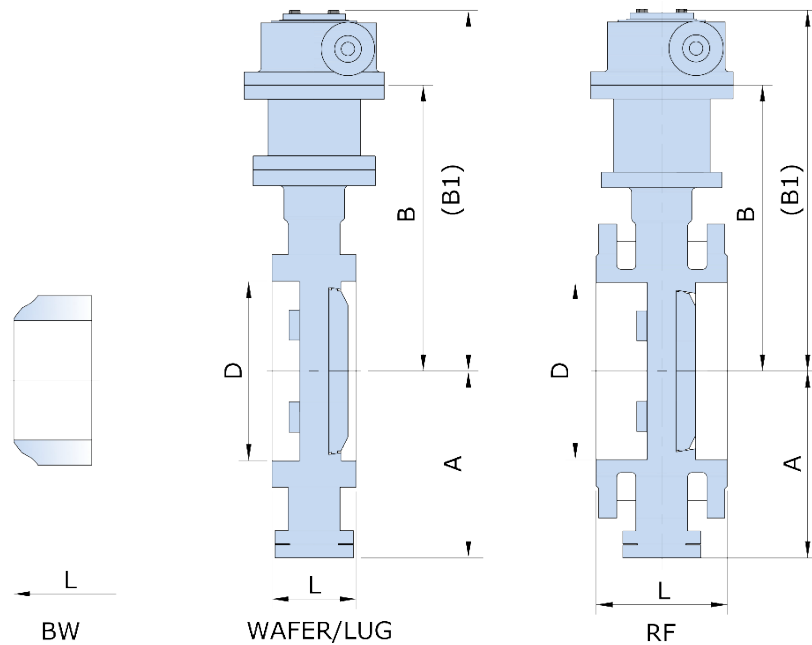

DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 1500 (PN 250)

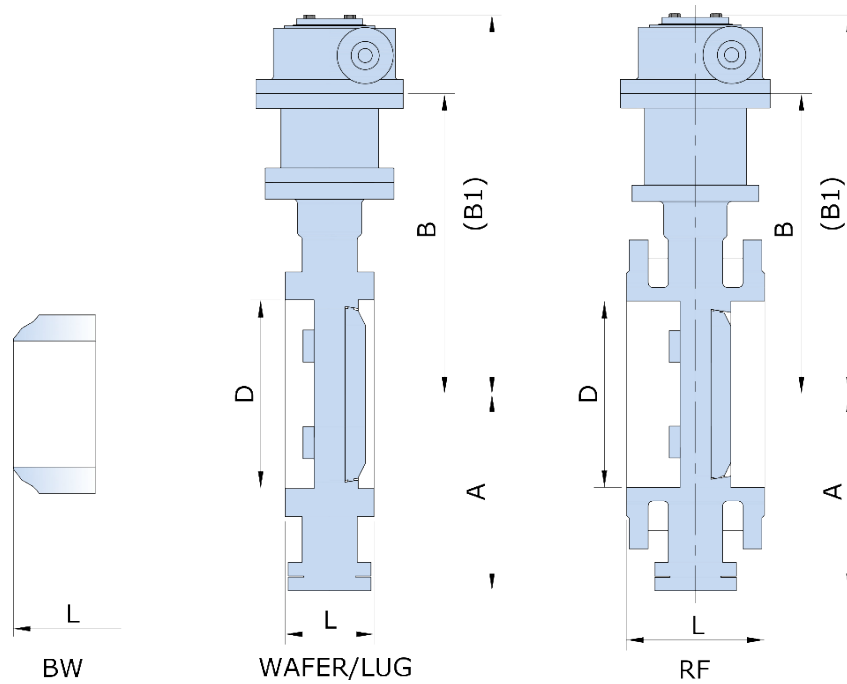

FLOW COEFFICIENT CV VALUE

Triple Offset Type

Class 150 (PN 20)

Size In mm	Disc Opening Angle								
	10°	20°	30°	40°	50°	60°			



Official commercial representative
of

